

CORDLESS: QUICK REFERENCE CHART

Impacts

Specifications	CT9100K2	CT9080K2	CT9050K2	CT9015K2	CT9010K2	CT861K2	CT825K2
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	18	18	18	18	18	14.4	14.4
Square Drive, inches (mm)	3/4 (19)	1/2 (13)	1/2 (13)	1/2 (13)	3/8 (10)	3/8 (10)	1/4 (6)
Torque Output, ft-lb (N•m)	1,000 (1,355)	1,050 (1,423)	800 (1,085)	240 (325)	240 (325)	150 (203)	70 (95)
Blows Per Minute, BPM	2,200	2,300	2,300	3,520	3,520	3,000	3,000
Free Speed, RPM	1,570	1,570	2,000	1,760	1,760	2,500	2,200
Height with Battery, inches (mm)	10.5 (267)	10.5 (267)	10.25 (260)	10 (254)	10 (254)	8.0 (203)	8.0 (203)
Length, inches (mm)	10.3 (261)	9.6 (244)	8.2 (208)	6.7 (170)	6.7 (170)	6.8 (173)	6.8 (173)
Weight with Battery, lb (kg)	8.9 (4.04)	8.2 (3.7)	6.5 (2.9)	4.9 (2.22)	4.9 (2.22)	2.7 (1.2)	2.7 (1.2)
Charge Time, minutes	90	90	90	90	90	70	70
Warranty (battery)	2 Years/1,000 Cycles	2 Years/1,000 Cycles	2 Years/1,000 Cycles	2 Years/1,000 Cycles	2 Years/1,000 Cycles	1 Year	1 Year
Warranty (tool and charger)	2 Years	2 Years	2 Years	2 Years	2 Years	1 Year	1 Year
Pinned Anvil Version	—	—	CT9050P	—	CT9010P	—	—
Quick-Change Chuck Version (hex size of chuck)	—	—	—	—	—	CTQ861 (1/4")	—
Tool Only	CT9100DB	CT9080DB	CT9050DB	CT9015DB	CT9010DB	CT861DB	CT825DB

CE

Drills/Drivers

Specifications	CDR9015K2	CDR9050K2	CDR861K2*	CDRR2005360K2	CDRR200545K2	CDRR2005K2	CDRR761K2	CDRS761K2
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	18	18	14.4	14.4	14.4	14.4	14.4	14.4
Chuck Capacity, inches (mm)	1/2 (13)	1/2 (13)	3/8 (10)	1/4"-28	1/4"-28	1/4"-28	3/8 (10)	3/8 (10)
Torque Output in-lb (N•m)	470 (53.1)	470 (53.1)	200 (22.6)	12 (1,355)	12 (1,355)	12 (1,355)	150 (16.9)	65 (7.3)
Clutch Settings	18 Plus Drill	23	9	—	—	—	9	9
Gear Box Type	2-Speed	2-Speed	2-Speed	Single-Speed	Single-Speed	Single-Speed	2-Speed	2-Speed
RPM (low)	420	420	450	—	—	—	450	450
RPM (high)	2,000	2,000	1,550	6,000	6,000	6,000	1,550	1,550
Length, inches (mm)	7.6 (193)	8.1 (205)	7.7 (198)	12 (305)	12 (305)	12 (305)	13.3 (338)	13.3 (338)
Weight with Battery, lb (kg)	5 (2.27)	5.1 (2.3)	2.4 (1.1)	1.4 (.64)	1.4 (.64)	1.4 (.64)	3.3 (1.5)	2.6 (1.2)
Charge Time, minutes	90	90	70	70	70	70	70	70
Warranty (battery)	2 Years	2 Years	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Warranty (tool and charger)	2 Years	2 Years	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Tool Only	CDR9015DB	CDR9050DB	CDR861DB	CDRR2005360DB	CDRR200545DB	CDRR2005DB	CDRR761DB	CDRS761DB

*UL® listed.

CE

Die Grinders

Specifications	CTGRS8806AK1	CTGRS8825AK1	CGRR861K2	CGRS861K2
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	18	18	14.4	14.4
Free Speed, RPM	6,000	25,000	9,500-28,000	10,000-30,000
Charge Time, minutes	90	90	70	70
Height with Battery, inches (mm)	4 (102)	4 (102)	3.3 (84)	3.3 (84)
Width with Battery, inches (mm)	3 (76)	3 (76)	2 (50)	2 (50)
Length, inches (mm)	11.4 (290)	11.4 (290)	11.4 (290)	11.4 (290)
Weight with Battery, lb (kg)	4.9 (2.2)	4.6 (2.1)	2.2 (0.99)	1.7 (.77)
Warranty (tool and charger)	2 Years	2 Years	1 Year	1 Year
Warranty (battery)	2 Years	2 Years	1 Year	1 Year
Tool Only	CTGRS8806ADB	CTGRS8825ADB	CGRR861DB	CGRS861DB

CE

K2 = US J2 = Japan U2 = Europe Z2 = Australia

Angle Grinders

Specifications	CTGR8850AK1	CTGR8855AK1
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah
Battery Voltage	18	18
Wheel Size, inches (mm)	4.5 (114) or 5 (127)	4.5 (114) or 5 (127)
Arbor Size, inches (mm)	7/8 (22)	7/8 (22)
Free Speed, RPM	8,000	8,000
Charge Time, minutes	90	90
Switch Type	Slide Switch	Safety Switch
Length w/battery, inches (mm)	16.5 (419)	16.5 (419)
Weight with Battery, lb (kg)	6.2 (2.8)	6.2 (2.8)
Warranty (tool and charger)	2 Years	2 Years
Warranty (battery)	2 Years/1,000 Cycles	2 Years/1,000 Cycles
Tool Only	CTGR8850ADB	CTGR8855ADB

CORDLESS: QUICK REFERENCE CHART

Ratchets

Specifications	CTR814K2	CTR817K2	CTR861K2	CTR867K2	CTR762K2	CTR768K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4	14.4	14.4	14.4	14.4
Charge Time, minutes	70	70	70	70	70	70
Square Drive, inches (mm)	1/4 (6)	1/4 (6)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Torque Output, ft-lb (N•m)	35 (47)	35 (47)	60 (81)	60 (81)	70 (95)	70 (95)
Manual Torque, ft-lb (N•m)	46 (62)	46 (62)	158 (214)	158 (214)	158 (214)	158 (214)
Free Speed, RPM	350	350	275	275	175	175
Height with Battery, inches (mm)	11.1 (282)	13.9 (353)	12.2 (310)	15.6 (396)	12.8 (324)	16.2 (411)
Weight with Battery, lb (kg)	2 (0.9)	2.4 (1.1)	2.7 (1.2)	3.3 (1.5)	2.8 (1.3)	3.5 (1.5)
Warranty (battery)	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Battery (qty)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A	CTC772A	CTC772A	CTC772A	CTC772A
Tool Only	CTR814DB	CTR817DB	CTR861DB	CTR867DB	CTR762DB	CTR768DB

CE

Screwdrivers

Specifications	CTS861K2	CTSR761K2	CTSS761K2
Style	Pistol	Inline	Inline
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4	14.4
Trigger Style	Toggle	Paddle	Paddle
Charge Time, minutes	70	70	70
Chuck Cap., inches (mm)	1/4 (6)	1/4 (6)	1/4 (6)
Square Drive, inches (mm)	1/4 (6) Hex	1/4 (6) Hex	1/4 (6) Hex
Torque Output, in-lb (N•m)	200 (22)	150 (16.9)	65 (7.3)
Clutch Settings	9	9	9
Gear Box Type	2-Speed	2-Speed	Single Speed
Free Speed, RPM	450/1,550	450/1,550	0-1,350
RPM (low)	0-450	0-450	—
RPM (high)	0-1,550	0-1,550	—
Length, inches (mm)	6.1 (155)	13.3 (338)	11.8 (300)
Width, inches (mm)	1.9 (48)	2 (50.8)	2 (50.8)
Height, inches (mm)	7.8 (198)	3.3 (84)	3.3 (84)
Weight with Battery, lb (kg)	2.1 (1.0)	2.7 (1.2)	2.2 (1.0)
Warranty (battery)	1 Year	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year	1 Year
Battery (qty)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A	CTC772A
Tool Only	CTS861DB	CTSR761DB	CTSS761DB

CE

Reciprocating Saw

Specifications	CTRS8850AK1	CTRS761AK2
Battery Type	Lithium 5.0 Ah	Lithium 2.5 Ah
Battery Voltage	18	14.4
Stroke Length, inches (mm)	1 (25.4)	1/2 (13)
Strokes Per Minute	2,400	3,100
Length, inches (mm)	18 (457)	12 (304)
Height with Battery, inches (mm)	8.25 (210)	—
Weight with Battery Pack (Li-Ion), lb (kg)	7.7 (3.4)	3.2 (1.5)
Variable Speed Switch	—	Yes
Charge Time, minutes	90	70
Warranty (battery)	2 Years/1,000 Cycles	1 Year
Warranty (tool and charger)	2 Years	1 Year
Battery (qty)	CTB185 (1)	CTB8174 (2)
Battery Charger	CTC131	CTC772A
Tool Only	CTRS8850ADB	CTRS761ADB

K2 = US J2 = Japan U2 = Europe Z2 = Australia



• Read and follow safety messages for each type of Cordless Tool on the following pages and the safety precautions on pages W1-W4

CORDLESS: 18-VOLT BRUSHLESS IMPACT WRENCHES



CT9100K2



CT9080K2

CT9100 Series 18 V 3/4" Drive Impacts

Specifications	CT9100K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Square Drive, inches (mm)	3/4 (19)
Torque Output, ft-lb (N•m)	1,000 (1,355)
Blows Per Minute, BPM	2,200
Free Speed, RPM	1,570
Height with Battery, inches (mm)	9.5 (241)
Length, inches (mm)	10.3 (261)
Weight with Battery, lb (kg)	8.9 (4.04)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Optional Protective Boot	CT9100BBOOT
Tool Body Only	CT9100DB

CT9100K2 18 V 3/4" Drive MonsterLithium Cordless Impact Wrench Kit

- 1,000 ft-lb (1,355 N•m) of torque output
- 1,300 ft-lb (1,763 N•m) of bolt breakaway torque
- Three torque setting adapt to various applications
- Cerakote premium nose resists abrasion
- Brushless motor for longer runtime and durability
- Super bright 100 lm LED light output
- Variable speed trigger for precise control
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CT9080 Series Impacts

Specifications	CT9080K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Square Drive, inches (mm)	1/2 (13)
Torque Output, ft-lb (N•m)	1,050 (1,423)
Blows Per Minute, BPM	2,300
Free Speed, RPM	1,570
Height with Battery, inches (mm)	9.5 (241)
Length, inches (mm)	9.6 (244)
Weight, lb (kg)	8.2 (3.7)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Optional Protective Boot	CT9075BBOOT
Tool Body Only	CT9080DB

CE - DE, ES, FR, IT, GB, NL, JP

CT9080K2 18 V 1/2" Drive MonsterLithium Cordless Impact Wrench Kit

- 1,050 ft-lb (1,423 N•m) of torque output
- 1,440 ft-lb (1,952 N•m) of bolt breakaway output
- Three torque settings adapt to various applications
- Cerakote premium nose resists abrasion
- Brushless motor for longer runtime and durability
- Super bright 100 lm LED light output
- Variable speed trigger for precise control
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB
Boot:	GBOOT HVBOOT		

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CT9010K2



CT9015K2

CT9010 Series 3/8" Drive Brushless Impacts

Specifications	CT9010K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Square Drive, inches (mm)	3/8 (10)
Anvil Type	Friction Ring
Torque Output, ft-lb (N•m)	240 (325)
Blows Per Minute, BPM	3,520
Free Speed, RPM	1,760
Sound Power Level, dB(A)	108
Sound Pressure Level, dB(A)	97
Vibration Level, m/s ²	8.6
Length, inches (mm)	6.7 (170)
Height w/Battery, inches (mm)	10 (254)
Weight w/Battery, lb (kg)	4.9 (2.22)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Pinned Anvil Version	CT9010P
Quick-Change Chuck Version (hex size of chuck)	CT9010QC
Tool Body Only	CT9010DB
Optional Protective Boot	CT9010BOOT

CE - DE, ES, GB, FR, IT, NL, UL, CUL

CT9010K2 18 V 3/8" Drive MonsterLithium Cordless Impact Wrench Kit

- 240 ft-lb (325 N•m) of torque output
- 325 ft-lb (441 N•m) of bolt breakaway torque
- Three torque settings adapt to various applications
- Cerakote premium nose resists abrasion
- Brushless motor for longer runtime and durability
- Super bright 100 lm LED light output
- Variable speed trigger for precise control
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 batteries, 1 Charger: K2 GK2 HVK2
Tool Only: DB GBD HVDB
Boot: GBOOT HVBOOT

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CT9015 Series 1/2" Drive Brushless Impacts

Specifications	CT9015K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Square Drive, inches (mm)	1/2 (13)
Anvil Type	Friction Ring
Torque Output, ft-lb (N•m)	240 (325)
Blows Per Minute, BPM	3,520
Free Speed, RPM	1,760
Sound Power Level, dB(A)	108
Sound Pressure Level, dB(A)	97
Vibration Level, m/s ²	8.6
Length, inches (mm)	6.7 (170)
Height with Battery, inches (mm)	10 (254)
Weight w/Battery, lb (kg)	4.9 (2.22)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Tool Body Only	CT9015DB
Optional Protective Boot	CT9010BOOT

CE - DE, ES, FR, IT, GB, NL, JP

CT9015K2 18 V 1/2" Drive MonsterLithium Cordless Impact Wrench Kit

- 240 ft-lb of torque output breaks loose stubborn fasteners
- Digital microprocessor-controlled switch maximizes performance, run time and durability
- Three torque settings in forward and three in reverse to adapt to various applications
- Built-in brake prevents tool from throwing fasteners and sockets
- Super bright 100 lm LED light output
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger: K2 GK2 HVK2
Tool Only: DB GDB HVDB
Boot: GBOOT HVBOOT

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



- Use only impact sockets and accessories with impact wrenches
- Read Safety Precautions on pages W1-W4

CORDLESS: 18-VOLT PLATFORMS



CT9050K2



CDR9050K2

CT9050 Series 1/2" Drive Impacts

Specifications	CT9050K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Square Drive, inches (mm)	1/2 (13)
Anvil Type	Friction Ring
Torque Output, ft-lb (N•m)	800 (1,085)
Blows Per Minute, BPM	2,300
Free Speed, RPM	2,000
Length, inches (mm)	8.2 (208)
Height with Battery, inches (mm)	9.5 (241)
Weight with Battery, lb (kg)	6.5 (2.9)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131 (1)
Pinned Anvil Version	CT9050P
Tool Only	CT9050DB
Optional Protective Boot	CT9050BOOT

CE – DE, ES, FR, IT, GB, NL, JP

CT9050K2 18 V 1/2" Drive MonsterLithium Cordless Impact Wrench Kit

- 800 ft-lb (1,085 N•m) of torque output
- 1,000 ft-lb (1,355 N•m) of bolt breakaway torque
- Three torque settings adapt to various applications
- Cerakote premium nose resists abrasion
- Brushless motor for longer runtime and durability
- Super bright 100 lm LED light output
- Variable speed trigger for precise control
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB
Boot:	GBOOT HVBOOT		

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CDR9050 Series 3/8" Drive Hammer Drills

Specifications	CDR9050K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Chuck Capacity, inches (mm)	1/2 (13)
Spindle Thread, inches	1/2"-20 UNF
Torque Output in-lb (N•m)	470 (53.1)
RPM (high)	2,000
RPM (low)	420
Clutch Settings	23
Gear Box Type	2-Speed
Length, inches (mm)	8.1 (205)
Height, inches (mm)	10.25 (260)
Weight with Battery, lb (kg)	5.1 (2.3)
Warranty (battery)	2 Years
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Tool Only	CDR9050DB

CDR9050K2 18 V 1/2" MonsterLithium Cordless Hammer Drill Kit

- 470 in-lb (53 N•m) of torque output
- Two-speed gear box (420/2,000) RPM
- Keyless 1/2" single sleeve metal chuck
- Drill, hammer, screw mode with 23 clutch settings
- Brushless motor for longer runtime and durability
- Variable speed trigger for precise tool control
- Super bright LED light output
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB
Boot:	GBOOT HVBOOT		

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CORDLESS: 18-VOLT PLATFORMS



CDR9015K2



CGG8850AK1

CDR9015 1/2" Drive Drills/Drivers

Specifications	CDR9015K2
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Chuck Capacity, inches (mm)	1/2 (13)
Spindle Thread, inches	1/2"-20 UNF
Torque Output in-lb (N•m)	470 (53.1)
RPM (high)	2,000
RPM (low)	420
Clutch Settings	18 Plus Drill
Gear Box Type	2-Speed
Length, inches (mm)	7.6 (193)
Height, inches (mm)	10.25 (260)
Weight with Battery, lb (kg)	5 (2.27)
Warranty (battery)	2 Years
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (2)
Battery Charger	CTC131
Tool Only	CDR9015DB

CE — DE, ES, GB, FR, IT, NL, UL, CUL

CDR9015K2 18 V 1/2" MonsterLithium Cordless Drill Kit

- 470 in-lb (53 N•m) of torque output
- Two-speed gear box (420/2,000) RPM
- Keyless 1/2" metal single sleeve keyless chuck
- Drill plus 18 clutch settings adjust for the application
- Brushless motor for longer runtime and durability
- Variable speed trigger for precise tool control
- Super bright LED light output
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB
Boot:	GBOOT HVBOOT		

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CGG8850A Grease Guns

Specifications	CGG8850AK1
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Pressure Rating, PSI	3,000 High Output/ 7,500 Low Output
Pressure Rating, BAR	206 High Output/517 Low Output
Capacity, Tubes Per Charge	Up to 27 (free flow)/ Up to 17 (@1,000 PSI)
Maximum Tube Capacity	14-1/2 oz (411 g) Cartridge/ 16 oz (454 g) Bulk
Handle Material	Glass-Reinforced Nylon
Coupler Design	3-Jaw
Hose Length, inches (mm)	36 (914)
Hose Type	High Pressure with Protective Spring Guards
Bulk Filler Valve	Yes
Air Purge Valve	Yes
Height with Grease Tube, inches (mm)	19 (483)
Weight with Battery Pack, lb (kg)	7.9 (3.6)
Weight without Battery Pack, lb (kg)	6.4 (2.9)
Warranty (battery)	2 Years
Warranty (tool)	2 Years
Battery (qty)	CTB185 (1)
Battery Charger	CTC131
Tool Only	CGG8850ADB

CGG8850AK1 18 V MonsterLithium Cordless Grease Gun Kit (One Battery/Charger)

- Two-speed, high-torque 18 V DC motor delivers outstanding flow and pressure
- 36" high-pressure hose with spring guard and coupler
- Accessible check valve and combination air bleeder/filler valve
- Dual motor protection includes self-resetting thermo-coupler
- Machined and hardened piston with plated steel barrel and premium grease follower
- Ergonomically designed to reduce fatigue and increase productivity
- 18 V high-amperage lithium ion battery provides outstanding run time
- Works well in cold environments
- Kit includes tool, (1) battery and a charger

Colors Available



1 Battery, 1 Charger:	K1	GK1	HVK1
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



- Use only impact sockets and accessories with impact wrenches
- Read Safety Precautions on pages W1-W4

CORDLESS: 18-VOLT PLATFORMS



CTCG8850K1



CTRS8850AK1

CTCG8850 Series Caulk Guns

Specifications	CTCG8850K1
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Feed Speed Rate, inches per minute	2–18
Vibration Level	.5 m/s ²
Sound Pressure Level (A), dB	56.8
Maximum Current	5 A
Maximum Feed Force, lbf	850
Weight w/Battery, lb (kg)	5.3 (2.4)
Warranty (tool and charger)	2 Years
Warranty (battery)	2 Years/1,000 Cycles
Battery (qty)	CTB185 (1)
Battery Charger	CTC131
Tool Body Only	CTCG8850DB

CTCG8850K1 18 V MonsterLithium Cordless Caulk Gun Kit

- High feed force to easily dispense material, even when cold
- Dispense rates from 2–18 inch/minute allows user to fine tune material dispensing
- Piston retracts automatically when trigger is released to stop material from dispensing—saves time and material
- Dispenses up to 400 tubes of caulk on a single charge
- Light weight for easy maneuverability
- Very low noise level and vibration reduces user fatigue
- Easily changes from one tube style to another to get the job done quickly
- 10 oz cartridge (included), optional kits available for 29 oz cartridge kit and 600 ml sausage kit

Colors Available



Red Green Hi-Viz

1 Battery, 1 Charger: K1 GK1 HVK1

Tool Only: DB GDB HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CTRS8850 Series Reciprocating Saw

Specifications	CTRS8850AK1
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Stroke Length, inches (mm)	1 (25.4)
Strokes Per Minute	2,400
Height with Battery, inches (mm)	8.25 (210)
Length, inches (mm)	18 (457)
Weight with Battery Pack, lb (kg)	7.7 (3.4)
Warranty (tool and charger)	2 Years
Warranty (battery)	2 Years/1,000 Cycles
Battery (qty)	CTB185 (1)
Battery Charger	CTC131
Tool Only	CTRS8850ADB

CTRS8850AK1 18 V MonsterLithium Cordless Reciprocating Saw Kit (One Battery/Charger)

- 2,400 strokes per minute
- 75 A rated, heavy-duty variable-speed trigger provides long life and is contoured to reduce user fatigue
- Heavy-duty 14-gauge internal wiring withstands high current loads during heavy sawing
- Spring-loaded blade retention system requires no tools and ejects broken blades easily
- Non-slip cushion grip nose reduces vibration and provides positive tool control
- Heavy-duty armature and balanced motor design for smooth operation
- Turbine-style cooling system reduces heat buildup, extending tool life
- Sealed nose mechanism prevents dirt and sawing debris from damaging internal components
- Kit includes tool, (1) battery and a charger

Colors Available



Red Green Hi-Viz

1 Battery, 1 Charger: K1 GK1 HVK1

Tool Only: DB GDB HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CTGR8845AK1



CTGR8855AK1



CTGR8850AK1

Grinders/Cut-Off Tools

Specifications	CTGR8845AK1	CTGR8855AK1	CTGR8850AK1
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah	Lithium 5.0 Ah
Battery Voltage	18	18	18
Charge Time, minutes	90	90	90
Wheel Size, inches (mm)	4.5 (114) or 5 (127)	4.5 (114) or 5 (127)	4.5 (114) or 5 (127)
Arbor Size, inches (mm)	7/8 (22)	7/8 (22)	7/8 (22)
Free Speed, RPM	8,000	8,000	8,000
Spindle Thread, inches	5/8"-11	5/8"-11	5/8"-11
Length w/battery, inches (mm)	16 (406)	16.5 (419)	16.5 (419)
Weight with Battery, lb (kg)	5.3 (2.4)	6.2 (2.8)	6.2 (2.8)
Switch Type	Paddle Switch	Safety Switch	Slide Switch
Warranty (tool and charger)	2 Years	2 Years	2 Years
Warranty (battery)	2 Years/1,000 Cycles	2 Years/1,000 Cycles	2 Years/1,000 Cycles
Replacement Grinding Wheel (size)	PT450-WH (4.5")	PT450-WH (4.5")	PT450-WH (4.5")
Replacement Cut-Off Wheel	CTGR-CW50	CTGR-CW50	CTGR-CW50
Battery (qty)	CTB185 (1)	CTB185 (1)	CTB185 (1)
Battery Charger	CTC131 (1)	CTC131 (1)	CTC131 (1)
Tool Only	CTGR8845ADB	CTGR8855ADB	CTGR8850ADB

UL® listed.
 CE - DE, ES, FR, IT, GB, NL, JP

CTGR8845AK1 18 V 4-1/2" MonsterLithium Cordless Standard Grinder Kit (One Battery/Charger)

- Standard head for use with 4-1/2" and 5" wheels
- Features a tool-free arbor nut for fast wheel changes
- Powerful motor delivers 8,000 RPM
- Includes removable cutting wheel guard for flexibility
- Electronic brake for enhanced user safety
- Motor screen helps keep debris out of the motor
- Battery rotates 270° for improved access
- Anti-vibration handle for less fatigue
- Paddle-style switch for OSHA® compliance
- Kit includes tool, (1) battery and a charger

CTGR8850AK1 18 V MonsterLithium Cordless Angle Grinder/Cut-Off Tool Kit (One Battery/Charger)

- 8,000 RPM handles most grinding jobs with ease
- Ultra-slim head allows user to access areas other grinders cannot
- Battery rotates 270° for improved access
- Accepts 4-1/2" or 5" wheels for more options to quickly get the job done
- Anti-vibration handle—allows user to work longer and more comfortably
- Replaceable motor screen—keeps debris out of the motor so tool lasts longer
- Seven-position safety guard—lets user tackle most jobs with less effort
- Tool-free guard removal—simply pull one guard off and slide the other one on
- Kit includes tool, (1) battery and a charger

CTGR8855AK1 18 V MonsterLithium Angle Grinder/Cut-Off Tool Kit with Safety Switch (One Battery/Charger)

- Flat head design for easy access
- 8,000 RPM handles most grinding jobs with ease
- Use with 4-1/2" or 5" wheels—more options to get the job done fast
- Seven-position safety guard
- Electronic safety clutch
- Motor screen keeps debris out of the motor to extend tool life
- Battery rotates 270° for improved access
- Anti-vibration handle—allows user to work longer and more comfortably
- High-stall torque
- OSHA® compliant switch
- Kit includes tool, (1) battery and a charger

CTGR-CW50 5" Abrasive Cutting Wheel

- Replacement cutting wheel for CTGR8850 cordless grinder

CTGR-CW50MP 5" Abrasive Cutting Wheel (25 pack)

- Replacement cutting wheel for CTGR8850 cordless grinder



• Use only impact sockets and accessories with impact wrenches
 • Read Safety Precautions on pages W1–W4

CORDLESS: 18-VOLT PLATFORMS



CTGRS8806AK1



CTGRS8825AK1

Die Grinders

Specifications	CTGRS8806AK1	CTGRS8825AK1
Battery Type	Lithium 5.0 Ah	Lithium 5.0 Ah
Battery Voltage	18	18
Charge Time, minutes	90	90
Collet Size, inches (mm)	1/4 (6)	1/4 (6)
Free Speed, RPM	6,000	25,000
Sound Pressure Level, dB(A)	81.6	80.5
Switch Type	Paddle Switch	Paddle Switch
Uncertainty K, dBA	3	3
Uncertainty, K (Vibration), m/s ²	1.5	1.5
Vibration Level, m/s ²	1.9	6.5
Height with Battery, inches (mm)	4 (102)	4 (102)
Width with Battery, inches (mm)	3 (76)	3 (76)
Weight with Battery, lb (kg)	4.9 (2.2)	4.6 (2.1)
Weight, lb (kg)	3.2 (1.5)	3.1 (1.4)
Warranty (battery)	2 Years	2 Years
Warranty (tool and charger)	2 Years	2 Years
Battery (qty)	CTB185 (1)	CTB185 (1)
Battery Charger	CTC131 (1)	CTC131 (1)
Tool Only	CTGRS8806ADB	CTGRS8825ADB

CE - DE, ES, FR, IT, GB, NL, JP

CTGRS8806AK1 18 V MonsterLithium Cordless Inline Die Grinder Kit (One Battery/Charger)

- 6,000 RPM to handle the big jobs
- Spindle lock for easy changing of accessories
- Tight tolerance collet for exact concentricity
- Overload protection prevents tool from over-heating
- Start-up protection prevents tool from starting after battery change
- Ergonomic design for positive tool control
- Standard 1/4" collet accepts most accessories
- Battery rotates 270° to adjust to each application
- Paddle style trigger for ease-of-use
- Kit includes tool, (1) battery and a charger

CTGRS8825AK1 18 V MonsterLithium Cordless Inline Die Grinder Kit (One Battery/Charger)

- 25,000 RPM handles the big jobs
- Spindle lock for easy changing of accessories
- Tight-tolerance collet for exact concentricity
- Overload protection prevents tool from overheating
- Start-up protection prevents tool from starting after battery change
- Ergonomic design for positive tool control
- Standard 1/4" collet accepts most accessories
- Battery rotates 270° for improved access
- Paddle-style trigger for ease of use
- Kit includes tool, (1) battery and a charger



CTBF8818K1

Cordless Sanders

Specifications	CTBF8818K1
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Belt Length, inches (mm)	18 (457)
Usable Belt Length, inches (mm)	3-9/16 (90)
Belt Speed, RPM	8,000
Belt widths, inches (mm)	1/4-1/2 (6-12)
Maximum Torque, in-lb	14
Length w/battery, inches (mm)	16.5 (419)
Switch Type	Safety Switch
Spindle Thread, inches	5/8"-11
Weight with Battery, lb (kg)	5.5 (2.5)
Warranty (battery)	2 Years
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (1)
Battery Charger	CTC131
Tool Body Only	CTBF8818DB

CE - DE, ES, FR, IT, GB, NL, JP


CTBF8818K1 18 V 18" MonsterLithium Cordless Band File Sander (One Battery/Charger)

- For grinding, burnishing and deburring in hard-to-access areas
- Head can be rotated 270° for flexibility
- Features a tool-free adjustable belt guide and cover for easy belt changes
- Includes 1/4-1/2" contour sanding arm—other arms sold separately
- Accepts 18" belt and has a workable surface of 3-9/16" to help get the job done quickly
- Motor screen helps keep debris out of the motor
- Battery can be rotated 270° without tools to adjust to any working position
- Anti-vibration handle helps reduce fatigue
- Detachable dust filter protects motor from coarse particles
- OSHA®-compliant switch for added safety
- Kit includes tool, (1) battery, (1) charger and a starter kit of belts

CTBFSA12 Band File Sanding Arm, 1/2"

CTBFSA14 Band File Sanding Arm, 1/4"

CTBFSA34 Band File Sanding Arm, 3/4"

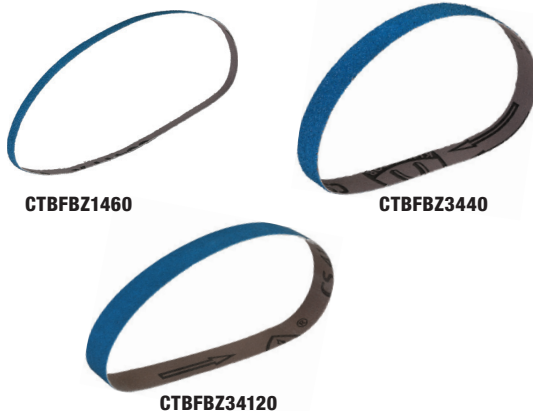

CTBFBZ1460

CTBFBZ3440

CTBFBZ34120



CTRG9050K1

Rivet Guns

Specifications	CTRG9050K1
Battery Type	Lithium 5.0 Ah
Battery Voltage	18
Charge Time, minutes	90
Pull Force, lb (kg)	4,400 (1,996)
Stroke Length, inches (mm)	.985 (25)
LED Light	3 Bulb
Height, inches (mm)	8.8 (225)
Weight, lb (kg)	5.8 (2.6)
Warranty (battery)	2 Years/1,000 Cycles
Warranty (tool and charger)	2 Years
Battery (qty)	CTB185 (1)
Battery Charger	CTC131
Tool Body Only	CTRG9050DB

CE - DE, ES, FR, IT, GB, NL, JP

CTRG9050K1 18 V MonsterLithium Brushless Rivet Gun Kit (One Battery/Charger)

- Brushless motor means superior durability, longer tool life and maximum run time
- 4,400 lb of pull force for precise accuracy
- LED light illuminates the work area
- Field replaceable long life jaws
- On board nose piece storage
- Heavy-duty tool hook allows for hanging
- Produces over 6,000 rivets on a battery charge to get the work done
- Operates with 1/8, 5/32, 3/16 and 1/4" rivets
- Kit includes tool, (1) battery and charger

Sanding Belts

Stock No.	Description
CTBFBC1240	Ceramic, 1/2 x 1/8-3/4", 40 grit (10 pk)
CTBFBC1260	Ceramic, 1/2 x 1/8-3/4", 60 grit (10 pk)
CTBFBC1280	Ceramic, 1/2 x 1/8-3/4", 80 grit (10 pk)
CTBFBC12120	Ceramic, 1/2 x 1/8-3/4", 120 grit (10 pk)
CTBFCA1412	Band File Contour Arm, 1/4-1/2
CTBFFB12COR	Fleeceband, 1/2 x 18-3/4", Coarse (5 pk)
CTBFFB12FNE	Fleeceband, 1/2 x 18-3/4", Fine (5 pk)
CTBFFBF12MED	Fleeceband, 1/2 x 18-3/4" Medium (5 pk)
CTBFFB14COR	Fleeceband, 1/4 x 18-3/4", Coarse (5 pk)
CTBFFB14FNE	Fleeceband, 1/4 x 18-3/4", Fine (5 pk)
CTBFFB14MED	Fleeceband, 1/4 x 18-3/4", Medium (5 pk)
CTBFFB34COR	Fleeceband, 3/4 x 18-3/4", Coarse (5 pk)
CTBFFB34FNE	Fleeceband, 3/4 x 18-3/4", Fine (5 pk)
CTBFFBF34MED	Fleeceband, 3/4 x 18-3/4" Medium (5 pk)
CTBFBZ1240	Zirconia, 1/2 x 18-3/4", 40 grit (10 pk)
CTBFBZ1260	Zirconia, 1/2 x 18-3/4", 60 grit (10 pk)
CTBFBZ1280	Zirconia, 1/2 x 18-3/4", 80 grit (10 pk)
CTBFBZ12120	Zirconia, 1/2 x 18-3/4", 120 grit (10 pk)
CTBFBZ1440	Zirconia, 1/4 x 18-3/4", 40 grit (10 pk)
CTBFBZ1460	Zirconia, 1/4 x 18-3/4", 60 grit (10 pk)
CTBFBZ1480	Zirconia, 1/4 x 18-3/4", 80 grit (10 pk)
CTBFBZ14120	Zirconia, 1/4 x 18-3/4", 120 grit (10 pk)
CTBFBZ3440	Zirconia, 3/4 x 18-3/4", 40 grit (10 pk)
CTBFBZ3460	Zirconia, 3/4 x 18-3/4", 60 grit (10 pk)
CTBFBZ3480	Zirconia, 3/4 x 18-3/4", 80 grit (10 pk)
CTBFBZ34120	Zirconia, 3/4 x 18-3/4", 120 grit (10 pk)



- Do not use sanding discs or accessories above their maximum rated RPM.
- Use only impact sockets and accessories with impact wrenches
- Read Safety Precautions on pages W1-W4

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CT825K2



CT861K2

CT825 Series Brushless Impact Wrenches

Specifications	CT825K2	CT861K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4
Charge Time, minutes	70	70
Square Drive, inches (mm)	1/4 (6)	3/8 (10)
Anvil Type	Friction Ring	Friction Ring
Torque Output, ft-lb (N•m)	70 (95)	150 (203)
Bolt Breakaway Torque, ft-lb (N•m)	100 (135)	225 (305)
Blows Per Minute, BPM	3,000	3,000
Free Speed, RPM	2,200	2,500
No Load Current	3.0 A	3.0 A
Length, inches (mm)	6.8 (173)	6.8 (173)
Width, inches (mm)	2 (51)	2 (51)
Height, inches (mm)	7 (178)	7 (178)
Height with Battery, inches (mm)	8.0 (203)	8.0 (203)
Weight with Battery, lb (kg)	2.7 (1.2)	2.7 (1.2)
Warranty (battery)	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year
Quick-Change Chuck Version (hex size of chuck)	—	CTQ861 (1/4")
Battery (qty)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A
Tool Only	CT825DB	CT861DB

CE - DE, ES, FR, IT, GB, NL, JP

CT825K2 14.4 V 1/4" Drive Brushless MicroLithium Cordless Impact Wrench Kit

- 70 ft-lb of torque output handles many common fasteners
- Variable speed standard style trigger for precise control
- Tri-beam headlights illuminate the work area
- Built in brake prevents the tool from throwing fasteners and sockets
- Over current and thermal protection of the motor prevents tool from overheating
- Under voltage protection will not overdraw the battery
- Built in fuel gauge indicates battery state of charge
- Cushion grip handle provides positive tool control with less user fatigue
- Glass filled nylon housing is durable and prevents breaking
- Brushless motor means superior durability, longer tool life and maximum run time
- 70 minute charge time
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CT861K2 14.4 V 3/8" Drive MicroLithium Cordless Impact Wrench Kit

- 150 ft-lb (203 N•m) of torque output
- 225 ft-lb (305 N•m) of bolt breakaway torque
- Tri-beam LED headlights illuminates work area
- Brushless motor for longer runtime and durability
- Variable speed trigger for precise tool control
- Glass filled nylon housing for durability
- Built in fuel gauge indicates battery state of charge
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CDR861K2

CDR861 Series 3/8" Capacity Brushless Drills

Specifications	CDR861K2
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Charge Time, minutes	70
Chuck Capacity inches (mm)	3/8 (10)
Clutch Settings	9
Gear Box Type	2-Speed
Torque Output in-lb (N•m)	200 (22.6)
Free Speed, RPM, Low (High)	0-450 (0-1,550)
Sound Pressure Level, dB(A)	73.7
Length, inches (mm)	7.7 (198)
Height inches (mm)	7.8 (198)
Width, inches (mm)	2 (50)
Operating Temperature	-4-120 °F (-20-60 °C)
RPM (low)	0-450
RPM (high)	0-1,550
Weight with Battery, lb (kg)	2.4 (1.1)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CDR861DB

UL® listed.
 CE - DE, ES, FR, IT, GB, NL, JP

CDR861K2 14.4 V 3/8" MicroLithium Cordless Drill Kit

- 200 in-lb (22.6 N•m) of torque output
- Two-speed gearbox (450/1,550) RPM
- Keyless 3/8" single sleeve steel chuck
- Nine position clutch to adjust for the application

- Brushless motor for longer runtime and durability
- Variable speed trigger for precise tool control
- Built in fuel gauge indicates battery state of charge
- Kit includes tool, (2) batteries and a charger

Colors Available



	Red	Green	Hi-Viz
2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



- Use only impact sockets and accessories with impact wrenches
- Read Safety Precautions on pages W1-W4

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CDRR761K2

CDRR761 Series 3/8" Capacity Right-Angle Drills

Specifications	CDRR761K2
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Charge Time, minutes	70
Chuck Cap., inches (mm)	3/8 (10)
Clutch Settings	9
Gear Box Type	2-Speed
Torque Output, in-lb (N•m)	150 (16.9)
Free Speed (RPM), Low (High)	0-450 (0-1,550)
Sound Pressure Level, dB(A)	73.7
Sound Power Level, dB(A)	85.3
Length, inches (mm)	13.3 (338)
Height, inches (mm)	4 (102)
Width, inches (mm)	2 (50)
Weight with Battery, lb (kg)	3.3 (1.5)
Operating Temperature Range	-4-120 °F (-20-60 °C)
RPM (low)	0-450
RPM (high)	0-1,550
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CDRR761DB

CDRR761K2 14.4 V 3/8" MicroLithium Cordless Right Angle Screw Gun/Drill Kit

- 150 in-lb of torque output handles a wide variety of applications
- Two-speed drill: 400/1,550 RPM; low speed for higher torque applications, high speed for drilling steel
- Nine-position clutch delivers 8-50 in-lb of torque
- Variable-speed switch—good featherability at low speed for driving screws
- Lightweight drill—only 3.2 lb with battery
- 3/8" keyless single-sleeve durable steel chuck makes changing bits easy
- Cushion grip handle provides comfortable non-slip control for less fatigue over time
- Small size to get into tight spots—under dash, firewall, etc.
- One-year full warranty and serviced by Snap-on® Service Centers
- Built-in gauge displays the battery charge state
- Integrated LED light
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger: **K2 GK2 HVK2**
 Tool Only: **DB GDB HVDB**

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CDRS761K2

CDRS761 Series 3/8" Capacity Inline Drills

Specifications	CDRS761K2
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Charge Time, minutes	70
Chuck Capacity, inches (mm)	3/8 (10)
Clutch Settings	9
Gear Box Type	2-Speed
Torque Output, in-lb (N•m)	65 (7.3)
Free Speed, RPM	0-1,350
Sound Pressure Level, dB(A)	80.4
Sound Power Level, dB(A)	89.6
Length, inches (mm)	13.3 (338)
Height, inches (mm)	4 (102)
Width, inches (mm)	2 (50)
Weight with Battery, lb (kg)	2.6 (1.2)
Operating Temperature Range	-4-140 °F (-20-60 °C)
RPM (low)	0-450
RPM (high)	0-1,550
Uncertainty K, dB(A)	3.0
Vibration Level, m/s ²	1.3
Storage Temperature	-4-140 °F (-20-60 °C)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Charger	CTC772A
Tool Only	CDRS761DB

CDRS761K2 14.4 V 3/8" MicroLithium Cordless Inline Drill Kit

- 150 in-lb of torque handles a wide variety of applications
- Two speeds (400/1,400 RPM): low speed for higher torque applications, high speed for steel drilling
- Variable-speed switch—good featherability at low speed for driving screws and control
- Nine-position clutch
- Lightweight drill—with battery only 2.4 lb
- 3/8" keyless drill chuck—single-sleeve durable steel chuck makes changing bits easy
- Cushion grip handle—non-slip, comfort for the operator, positive tool control allows the operator to work longer with less fatigue
- Small size to get in tight spots: under dash, firewall, etc.
- One-year full warranty and serviced by Snap-on® Service Centers
- Built-in gauge displays the battery charge state
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger: **K2 GK2 HVK2**
 Tool Only: **DB GDB HVDB**

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CDRR2005K2



CDRR200545K2



CDRR2005360K2

CDRR2005 Series Angle Mini Drill

Specifications	CDRR2005K2	CDRR200545K2	CDRR2005360K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4	14.4
Charge Time, minutes	70	70	70
Bit Thread Size	1/4"-28	1/4"-28	1/4"-28
Free Speed, RPM	6,000	6,000	6,000
Length Angle Head (Front to Back), inches (mm)	1.12 (28)	1 (25)	3 (76)
Sound Pressure Level, dB(A)	74.2	74.2	74.2
Height (Head Assembly), inches (mm)	4.4 (112)	4.4 (112)	4.4 (112)
Height with Battery, inches (mm)	13.1 (333)	13.1 (333)	13.1 (333)
Vibration Level, m/s ²	8.02	8.02	8.02
Width, inches (mm)	1.8 (46)	1.8 (46)	1.8 (46)
Length, inches (mm)	12 (305)	12 (305)	12 (305)
Height, inches (mm)	3.3 (84)	3.3 (84)	3.3 (84)
Weight with Battery, lb (kg)	1.4 (.64)	1.4 (.64)	1.4 (.64)
Operating Temperature Range	-4-120 °F (-20-60 °C)	-4-120 °F (-20-60 °C)	-4-120 °F (-20-60 °C)
Warranty (battery)	1 Year	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year	1 Year
Optional 1/4" Collet	YA409-6	YA409-6	YA409-6
Battery (qty)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A	CTC772A
Tool Only	CDRR2005DB	CDRR200545DB	CDRR2005360DB

CE - DE, ES, FR, IT, GB, NL, JP

CDRR2005K2 14.4 V MicroLithium Cordless Right Angle Mini Drill Kit

- Compact head for great access
- Low runout for precise drilling
- Accepts 1/4"-28 threaded bits and accessories
- Double ball bearing supported spindle shaft for durability
- Spiral beveled gears for durability and smooth operations
- 90° angle for great access
- LED light illuminates work area
- Soft grip handle for positive tool control
- Battery fuel gauge indicates battery charge state
- Kit includes tool, (2) batteries and a charger

CDRR2005360K2 14.4 V MicroLithium Cordless 360° Angle Head Mini Drill Kit

- Small compact head for greater access into places traditional pistol style drills cannot
- Low runout for precise accurate drilling
- Accepts 1/4"-28 threaded bits and accessories and standard 1/4" accessories with adaptor (not included)
- Double ball bearing supported spindle shaft for durability
- Spiral beveled gears for durability and smooth operation
- 360° angle head for great accessibility
- Built-in LED illuminates work area
- Soft grip handle for positive tool control
- Battery fuel gauge indicates the battery state of charge
- Variable speed trigger for slow start up
- Proven lower unit and head
- Kit includes tool, (2) batteries and a charger

CDRR200545K2 14.4 V MicroLithium Cordless 45° Angle Head Mini Drill Kit

- Same features as the CDRR2005360K2



- Use only impact sockets and accessories with impact wrenches
- Read Safety Precautions on pages W1-W4

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CTS861K2

CTS861 Series Screwdrivers

Specifications	CTS861K2
Style	Pistol
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Trigger Style	Toggle
Charge Time, minutes	70
Chuck Cap., inches (mm)	1/4 (6)
Square Drive, inches (mm)	1/4 (6) Hex
Torque Output, in-lb (N•m)	200 (22)
Clutch Settings	9
Gear Box Type	2-Speed
Free Speed, RPM	450/1,550
RPM (low)	0-450
RPM (high)	0-1,550
Length, inches (mm)	6.1 (155)
Width, inches (mm)	1.9 (48)
Weight with Battery, lb (kg)	2.1 (1.0)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CTS861DB

CE - DE, ES, FR, IT, GB, NL

CTS861K2 14.4 V 1/4" Hex MicroLithium Cordless Toggle Screwdriver Kit

- 200 in-lb of torque output
- Two-speed gearbox: 450/1,550 RPM
- Brushless motor for longer runtime and durability
- 300 in-lb manual spindle lock
- Nine-position clutch provides the ability to dial in the proper torque
- Glass-filled nylon housing for durability
- Variable-speed toggle-style trigger for precise control
- Twin-beam headlights illuminate work area
- Quick 70-minute battery charge for less down time
- Undervoltage protection will not overdraw the battery; overcurrent protection of the electronics
- Built-in gauge displays the battery charge state
- Screened motor keeps debris from entering critical components
- Cushion grip handle provides positive tool control with less fatigue
- UL® and cUL® listed
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger: K2 GK2 HVK2
 Tool Only: DB GDB HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CTSR761K2

CTSR761 Series Screwdrivers

Specifications	CTSR761K2
Style	Inline
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Trigger Style	Paddle
Charge Time, minutes	70
Chuck Cap., inches (mm)	1/4 (6)
Square Drive, inches (mm)	1/4 (6) Hex
Torque Output, in-lb (N•m)	150 (16.9)
Clutch Settings	9
Gear Box Type	2-Speed
Free Speed, RPM	450/1,550
RPM (low)	0-450
RPM (high)	0-1,550
Width, inches (mm)	2 (50.8)
Weight with Battery, lb (kg)	2.7 (1.2)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CTSR761DB

CE

CTSR761K2 14.4 V 1/4" MicroLithium Cordless Right Angle Screwdriver Kit

- Features an oversized paddle trigger and easy-access Forward/Reverse button
- 150 in-lb of torque
- 450-1,550 RPM free speed
- Ergonomic cushion grip
- Two-speed gearbox
- Variable-speed extended trigger
- Nine-position clutch
- Built-in LED light
- Rapid 70-minute charge time
- Ideal for metals, plastic, aluminum, fiberglass, exhaust, hanger work, ATVs and mud flaps
- Used for dash work, stripped fasteners and removing/installing panels
- Handles most standard-style screwdriver bits, as well as power bits
- One-handed bit insertion
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger: K2 GK2 HVK2
 Tool Only: DB GDB HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CTRS761AK2

CTRS761 Series Saws

Specifications	CTRS761AK2
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Motor Voltage (VDC)	14.4
Charge Time, minutes	70
Strokes Per Minute	3,100
Stroke Length, inches (mm)	1/2 (13)
Sound Power Level (A), dB	87.7
Sound Pressure Level (A), dB	76.1
Uncertainty, K (Cutting 4 x 4" SPF Lumber), m/s ²	2.72
Uncertainty, K (Noise), dB	3
Uncertainty, K (Vibration), m/s ²	1.54
Vibration Level (Cutting 4 x 4" SPF Lumber), m/s ²	7.41
Vibration Level, m/s ²	11.97
Variable Speed Switch	Yes
Length, inches (mm)	12 (304)
Weight with Battery Pack (Li-Ion), lb (kg)	3.2 (1.5)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CTRS761ADB

CTRS761AK2 14.4 V MicroLithium Cordless Reciprocating Saw Kit

- 3,100 strokes per minute
- Small and lightweight; ideal for use in confined areas
- Dual chuck mechanism (quick chuck)
- Tool-free adjustment of the depth guide
- Variable-speed switch
- Integrated LED work light
- LED gauge indicates battery charge state
- Six-position adjustable footplate
- Quick, one-handed blade release
- Housing screen keeps debris out of the motor
- Lock-off switch is located above the trigger
- Variable-speed trigger
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger: **K2** **GK2** **HVK2**
 Tool Only:: **DB** **GDB** **HVDB**

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CTSS761K2

CTSS761 Series Screwdrivers

Specifications	CTSS761K2
Style	Inline
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Trigger Style	Paddle
Charge Time, minutes	70
Chuck Cap., inches (mm)	1/4 (6)
Clutch Settings	9
Square Drive, inches (mm)	1/4 (6) Hex
Sound Power Level A, dBA	76.9
Sound Pressure Level A, dBA	65.3
Torque Output, in-lb (N•m)	65 (7.3)
Free Speed, RPM	0-1,350
Gear Box Type	Single Speed
Uncertainty K, dBA	3.0
Vibration Level, m/s ²	0.93
Vibration Uncertainty K, m/s ²	0.25
Length, inches (mm)	11.8 (300)
Width, inches (mm)	2 (50.8)
Weight with Battery, lb (kg)	2.2 (1.0)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CTSS761DB

CTSS761K2 14.4 V MicroLithium Cordless Inline Screwdriver Kit

- 65 in-lb of torque output to get the job done
- 1,350 RPM
- Variable-speed trigger allows the user to regulate the proper RPM
- Nine-position clutch to dial in the proper torque
- Built-in LED illuminates work area
- Rapid 70-minute charge time keeps the job moving
- Handles most standard style screwdriver bits as well as power bits
- One-handed bit insertion
- Cushion grip handle provides comfortable non-slip control for less fatigue over time
- Easy-access Forward/Reverse button
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger: **K2** **GK2** **HVK2**
 Tool Only: **DB** **GDB** **HVDB**

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



• Read Safety Precautions on pages W1-W4

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CTR762K2



CTR861K2



CTR814K2

CTR762 Series 14.4 V Snap-on® Brute Cordless Ratchet

Specifications	CTR762K2	CTR861K2	CTR814K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4	14.4
Charge Time, minutes	70	70	70
Square Drive, inches (mm)	3/8 (10)	3/8 (10)	1/4 (6)
Torque Output, ft-lb (N•m)	70 (95)	60 (81)	35 (47)
Manual Torque, ft-lb (N•m)	158 (214)	158 (214)	46 (62)
Free Speed, RPM	175	275	350
Height with Battery, inches (mm)	12.8 (324)	12.2 (310)	11.1 (282)
Weight with Battery, lb (kg)	2.8 (1.3)	2.7 (1.2)	2 (0.9)
Warranty (battery)	1 Year	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year	1 Year
Battery (qty)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A	CTC772A
Tool Only	CTR762DB	CTR861DB	CTR814DB

CE

CTR762K2 14.4 V 3/8" Drive MicroLithium Cordless Ratchet Kit

- 70 ft-lb of torque output to get the job done
- Variable-speed trigger for precise tool control
- Integrated LED light illuminates the work area
- Cushion grip handle provides positive tool control
- Large forward/reverse knob for easy change of direction
- LED fuel gauge helps identify the battery's charge state
- 2.5 Ah batteries for extra-long run time between charges
- Kit includes tool, (2) batteries and a charger

CTR861K2 14.4 V 3/8" Drive MicroLithium Cordless Ratchet Kit

- 60 ft-lb of torque output gets the big jobs done
- 158 ft-lb of manual torque helps bust stubborn fasteners loose
- 275 RPM free speed removes fasteners rapidly
- Super bright 18 lm light stays illuminated after trigger is released
- Brushless motor means superior durability, longer tool life and maximum run time
- Auto trigger shuts tool off after two minutes of continuous use
- Variable-speed trigger allows for slow start-ups
- Cushion grip handle for positive tool control
- Built-in fuel gauge indicates battery charge
- Large greased forward/reverse knob allows for lubricating the head
- Kit includes tool, (2) batteries and a charger

CTR814K2 14.4 V 1/4" Drive MicroLithium Cordless Ratchet Kit

- Powerful 35 ft-lb of torque output, perfect for applications with fasteners 12 mm or smaller
- 350 RPM free speed removes fasteners rapidly
- Brushless motor for longer run time and durability
- Integrated LED headlight illuminates work area
- Variable speed trigger for precise tool control
- Over and under temperature protection keeps tool operating efficiently
- Cushion grip handle for positive tool control with less user fatigue
- Large greasable reversing knob for ease of direction change
- Battery gauge displays power remaining indicates battery charge state
- Includes tool, (2) batteries and charger

Colors Available



2 Batteries, 1 Charger: K2 GK2 HVK2
 Tool Only: DB GDB HVDB
 ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CTR768K2

CTR817K2

CTR867K2

CTR768 Series Long-Neck Ratchets

Specifications	CTR768K2	CTR817K2	CTR867K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4	14.4
Charge Time, minutes	70	70	70
Square Drive, inches (mm)	3/8 (10)	1/4 (6)	3/8 (10)
Torque Output, ft-lb (N•m)	70 (95)	35 (47)	60 (81)
Manual Torque, ft-lb (N•m)	158 (214)	46 (62)	158 (214)
Free Speed, RPM	175	350	275
Height with Battery, inches (mm)	16.2 (411)	13.9 (353)	15.6 (396)
Weight with Battery, lb (kg)	3.5 (1.5)	2.4 (1.1)	3.3 (1.5)
Warranty (battery)	1 Year	1 Year	1 Year
Warranty (tool and charger)	1 Year	1 Year	1 Year
Battery (qty)	CTB8174 (2)	CTB8174 (2)	CTB8174 (2)
Battery Charger	CTC772A	CTC772A	CTC772A
Tool Only	CTR768DB	CTR817DB	CTR867DB

CE- DE, ES, FR, IT, GB, NL, JP

CTR768K2 14.4 V 3/8" Drive MicroLithium Cordless Long-Neck Ratchet Kit

- 70 ft-lb of torque output to get the job done
- Variable-speed trigger for precise tool control
- Integrated LED light illuminates the work area
- Cushion grip handle provides positive tool control
- Large forward/reverse knob for easy direction change
- Battery gauge displays power remaining
- Uses 2.5 Ah battery for extra-long run time
- Long neck to access hard-to-reach fasteners
- Includes tool, (2) batteries and a charger

CTR817K2 14.4 V 1/4" Drive MicroLithium Cordless Long-Neck Ratchet Kit

- Powerful 35 ft-lb of torque output, perfect for applications with fasteners 12 mm or smaller
- 350 RPM free speed removes fasteners rapidly
- Variable-speed trigger for precise tool control
- Built in LED illuminates work area
- Long 6" extended neck for great accessibility
- Brushless motor means superior durability, longer tool life and maximum run time
- Kit includes tool, (2) batteries and a charger

CTR867K2 14.4 V 3/8" Drive MicroLithium Cordless Long-Neck Ratchet Kit

- 60 ft-lb of torque output removes stubborn fasteners
- 158 ft-lb of manual torque to loosen rusty fasteners
- 275 RPM gets the job done quickly
- Variable-speed trigger for precise control
- Over- and under-temperature protection keeps tool operating at peak efficiency
- Cushion grip handle provides comfortable non-slip control for less fatigue over time
- Large, greasable forward/reverse knob makes it easy to switch directions
- Battery gauge displays power remaining
- Integrated 18 lm LED headlight illuminates work area
- Brushless motor means superior durability, longer tool life and maximum run time
- Kit includes tool, (2) batteries and a charger

Colors Available



Red Green Hi-Viz

2 Batteries, 1 Charger: K2 GK2 HVK2

Tool Only: DB GDB HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



WARNING



• Read Safety Precautions on pages W1–W4

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CGRS861K2



CGRR861K2

CGRS861/CGRR861 Series Die Grinders

Specifications	CGRS861K2	CGRR861K2
Battery Type	Lithium 2.5 Ah	Lithium 2.5 Ah
Battery Voltage	14.4	14.4
Warranty (battery)	1 Year	1 Year
Charge Time, minutes	70	70
Warranty (tool and charger)	1 Year	1 Year
Chuck Capacity, inches (mm)	1/8 (3) and 1/4 (6)	1/8 (3) and 1/4 (6)
Weight with Battery, lb (kg)	1.7 (.77)	2.2 (0.99)
Free Speed, RPM	10,000–30,000	9,500–28,000
Length with Battery, inches (mm)	11.4 (290)	11.4 (290)
Width with Battery, inches (mm)	2 (50)	2 (50)
Height with Battery, inches (mm)	3.3 (84)	3.3 (84)
Battery (qty)	CTB8174 (2)	CTB8174 (2)
Charger	CTC772A	CTC772A
Tool Only	CGRS861DB	CGRR861DB

CE - DE, ES, FR, IT, GB, NL, JP

CGRS861K2 14.4 V MicroLithium Brushless Cordless Inline Die Grinder Kit

- Ideal for use with 2" accessories
- Small, lightweight and portable
- Dual collet system accepts 1/8" or 1/4" accessories
- Push-button spindle lock for fast bit changes
- Variable speed allows user to adjust the required torque
- Low battery light indicates when battery needs charging
- 10,000–30,000 RPM
- 1.7 lb weight and 11.4" overall length allows for easy access and maneuverability
- Kit includes tool, (2) batteries and a charger

CGRR861K2 14.4 V MicroLithium Brushless Cordless Right Angle Die Grinder Kit

- Same features as CGRS861K2
- 9,500–28,000 RPM
- 2.2 lb weight and 11.4" overall length allows for easy access and maneuverability
- Kit includes tool, (2) batteries and a charger

Colors Available



2 Batteries, 1 Charger:	K2	GK2	HVK2
Tool Only:	DB	GDB	HVDB

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

CORDLESS: 14.4-VOLT MICROLITHIUM PLATFORMS



CTG861K1

CTG861 Series Color Display Infrared Thermometers

Specifications	CTG861K1
Alarm	On/Off and High/Low
Ambient Operating Range, °F (°C)	32–120 (0–50)
Runtime on a Single Battery Charge, hours	35
Display Hold	Last reading and operating mode display for 10 sec nominal upon trigger release
Distance To Spot Size	12:1 (90% energy covered)
Emmissivity	0.30–0.99 Adjustable
IR Accuracy	0–560 °C; ±2% or 2 °C; -18–0 °C: 5 °C 560–1,000 °C ±2% ±3dig
IR Repeatability (+23 Ems=0.95)	±2% or ±2 °C/°F
IR Resolution	< 1,000 °C/°F; 0.1 °C/°F; > 1,000 °C/°F; 1 °C/°F
K Type Range (Optional)	-328–2,372 °F (-200–1,300 °C)
K Type Accuracy (Optional)	.05% of Reading ±1.8 °F (±1 °C)
Record	Rec/Max/Min
Relative Humidity	10–80% RH non-condensing
Response Time	500 mSec
Spectral Response	7–14 um
Storage Temperature	14–140 °F (-10–60 °C) without Battery
Battery (qty)	CTB8174 (1)
Battery Type	Snap-on® 14.4 Volt
Charger	CTC772A
Tool Only	CTG861DB

CE - DE, ES, FR, IT, GB, NL, JP

CTG861K1 14.4 V MicroLithium Color Display Cordless Temperature Gun Kit

- Safe non-contact and contact temp options
- Temperature range: -58–1,832 °F (-50–1,000 °C)
- Records min, max and live readings
- SATURNCIRCLE SIGHT laser pointer
- Adjustable emissivity from 0.3–1.0
- Response time 500 mSec
- Alarm On/Off and High/Low
- 35-hour continuous run-time
- High-contrast, large color LCD display with backlight
- Kit includes tool, (1) battery and a charger



CTPP861K2

CTPP861 Series Polish/Prep Tools

Specifications	CTPP861K2
Battery Type	Lithium 2.5 Ah
Battery Voltage	14.4
Charge Time, minutes	70
Spindle Thread, inches	5/16"-24 UNF
Free Speed, RPM, Low (High)	0–3,500 (0–15,000)
Height, inches (mm)	7-4/5 (198)
Length, inches (mm)	5.75 (146)
Warranty (battery)	1 Year
Warranty (tool and charger)	1 Year
Battery (qty)	CTB8174 (2)
Battery Charger	CTC772A
Tool Only	CTPP861DB

CE - DE, ES, FR, IT, GB, NL, JP

CTPP861K2 14.4 V MicroLithium Brushless Cordless Polish/Prep Tool Kit

- Two-speed gearbox: 3,500/15,000 RPM
- Digital variable-speed trigger for precise tool control
- Push-button spindle lock for ease of use with accessories
- 5/16"-24 UNF threads
- Cushion grip handle provides positive tool control
- Built-in gauge indicates battery charge state
- 2.5 Ah battery for extra long runtime between charges
- Kit includes tool, (2) batteries and a charger
- Includes various sanding accessories

CORDLESS: LIGHTS

Cordless Lights

CTLAR761 14.4 V MicroLithium 500 Lumen Cordless Angular Light (Tool Only)

- Variable brightness switch (0–100%) offers the ability to select the right amount of light for every situation
- Intelligent lighting control provides visual warning when light has less than 5% power remaining
- Built-in hook, (2) magnets and tether point provide maximum flexibility when attaching light to work site
- 4-hour run time at 100% brightness; 8 hours at 40%
- IP65 rated for water and dust resistance, allowing for exposure in even the toughest environments
- Battery gauge displays power remaining
- Ergonomic grip and pivoting light bar provide comfort and light where needed most
- Works with CTB8174 battery
- Battery and charger not included



CTLAR761



• Read Safety Precautions on pages W1–W4

CORDLESS: LIGHTS



CTLZ761

Flashlights

CTLZ761 14.4 V MicroLithium 200 Lumen Work Light with Laser (Tool Only)

- 200 lm output
- Low battery indicator (10 minutes)
- 4-hour run time
- Laser pointer
- Resists automotive fluids
- Impact-modified nylon housing
- Tempered-glass lens
- Works with CTB6172, CTB7172, CTB8172, CTB8172BK and CTB8174 batteries
- Battery and charger not included



CTLED861

CTLED861* 14.4 V MicroLithium 500 Lumen Cordless Work Light (Tool Only)

- 500 lm output
- 120° rotating head
- 13-hour run time, with 10-minute low battery indicator
- Tempered-glass lens
- Easily adjusts from spot to flood
- Aluminum head
- Resists automotive fluids
- Impact-modified glass-filled nylon housing
- High-quality LED bulb
- Works with CTB6172, CTB7172, CTB8172, CTB8172BK and CTB8174 batteries
- Battery and charger not included




CTLED9050

Flashlights

CTLED9050 18 V MonsterLithium 800 Lumen Cordless Work Light (Tool Only)

- High output light; 800 lm
- Dual reflector system easily changes from flood to beam
- 120° rotating head
- 50,000-hour bulb life
- 11-hour run time
- Tempered glass lens resists cracking and yellowing
- Resists most automotive fluids
- Low battery light indicates when battery needs charging
- High/Low switch allows user to reduce light output 50%
- Battery and charger not included

Colors Available



ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CTLUV761

Ultraviolet Flashlights


CTLUV761 14.4 V MicroLithium UV Cordless Work Light

- Detect leaks with this 14.4 V MicroLithium cordless UV Work Light
- Compatible with standard leak detection dyes
- Inspection range of 8' or more
- More than 10 hours of run-time
- Tempered-glass lens
- Resists automotive fluids
- Low battery indicator (10 minutes)
- Works great with ACTR53625 universal dye
- Includes fluorescence-enhancing glasses



CTLUH861

Colors Available



ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

Underhood Lighting

CTLUH861 14.4 V MicroLithium Cordless Underhood Light (Tool Only)

- Ultra-bright 1,000 lm output
- 4-hour run time; ideal for underhood, undercarriage and over-dash applications
- Expandable 81" clamp to position light at work area
- High-impact plastic light tube and housing
- 10-minute low battery indicator
- Includes hook with peg for hanging
- Works with CTB8172, CTB8172BK and CTB8174 batteries
- Battery and charger not included



CTLU861

Colors Available



ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.

Shop Lights

CTLU861 14.4 V MicroLithium 700 Lumen Cordless Utility Light (Tool Only)

- 700 lm ultra-bright output
- 6-hour run time
- 60 LED bulbs
- 10-minute low battery indicator
- Hanging hook
- Multi-position switch
- Resists most automotive fluids
- Works with Snap-on® lithium batteries
- Ergonomic cushion grip for better control
- High-impact, replaceable light tube resists cracking and discoloration
- Battery and charger not included

CORDLESS: FLOODLIGHTS




CTL8850

Floodlights

CTL8850 18 V MonsterLithium 750 Lumen LED Cordless Floodlight (Tool Only)

- Super-bright four-LED light
- Compact design for versatile use
- Rotates 120° and swivels 180° to direct light to the work area
- Tempered-glass lens
- Dual brightness settings (750 and 375 lm)
- 8-hour minimum run time (high setting)
- Resists automotive fluids
- Battery and charger not included



ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS.



CTFL9050

CTFL9050 18 V MonsterLithium 2,700 Lumen Cordless Floodlight (Tool Only)

- 18 V or 110 V dual power source
- Adjustable head allows for infinite adjustments
- Polycarbonate field-replaceable lens
- Low, medium and high settings
- 9.5 hours run time on low, 5.5 hours on medium and 2.5 hours on high
- 3.0 A USB and 2.1 A USB
- Rear-facing, red-flashing LED for roadside safety
- Large handle for easy transport
- Large front control panel for easy setting changes
- 2,700 lm output
- Sturdy wide base helps prevent tipping during use
- Rubber feet base for positive surface contact
- Battery and charger not included

CORDLESS: POWER TOOLS



CTBTSP861R

Cordless Speakers

CTBTSP861R 14.4 V MicroLithium Cordless Bluetooth® Speaker (Tool Only)

- Portable Bluetooth® connectivity up to 33' away—quality sound when and where needed
- Designed with technicians in mind, durable overmold and metal to help withstand shop environments
- Premium hi-fi sound with dual speakers for a rich quality sound experience
- Pairing feature allows an additional speaker to play simultaneously
- Harmonic distortion of .25% for crisp and clean sound
- IP54 rated resists water, automotive fluids and dust filtration
- Built-in USB output 5 V/1 A for accessory charging
- Works on Snap-on® 14.4 V battery packs
- Compatible with optional Snap-on® CTLMAGBOOT for mounting to metal surfaces
- Functions: Power, Play/Pause/USB Output, Prev/Next, Volume +/-
- Batteries and charger not included



CTBTSR9050

CTBTSR9050 18 V MonsterLithium Cordless Bluetooth® Speaker Radio (Tool Only)

- True Wireless Stereo (TWS)—pairing capable
- AM/FM radio with super tune
- Rugged structural roll cage frame design
- Powered with Snap-on® 18 V battery (not included), or 110 V AC power cord
- Two 2.1 A USB ports
- Auxiliary jack for non-Bluetooth® devices
- Integrated headphone jack
- Easy Bluetooth® pairing from up to 100' away
- Large, convenient carry handle with textured soft grip
- Easy-to-operate controls
- Incoming call feature pauses audio when call is accepted
- Power saving mode automatically puts unit in standby after five minutes of inactivity saving battery charge
- Rubber antenna prevents antenna breakage
- Batteries and charger not included



CTBTS9050

CTBTS9050 18 V MonsterLithium Cordless Bluetooth® Speaker (Tool Only)

- Powered with Snap-on® 18 V batteries or 110 V AC power cord
- Approximately 18-hour run time on fully charged 18 V battery under typical-use conditions
- Two (2) 2.1 A USB ports
- Auxiliary jack for non-Bluetooth® devices
- Integrated headphone jack
- Rugged structural roll cage-designed frame
- Easy Bluetooth® pairing up to 100'
- Large convenient carry handle with textured soft grip
- Easy-to-operate controls
- Incoming call feature pauses audio when call is accepted
- Power-saving mode automatically puts unit in standby after five minutes of inactivity, saving battery charge
- Battery and charger not included



• Read and follow safety messages in the instructions.
• Read Safety Precautions on pages W1–W4

CORDLESS: POWER TOOLS



CTFAN9050

Cordless Fans

CTFAN9050 18 V MonsterLithium Cordless Heavy-Duty Fan (Tool Only)

- 1,500 RPM air speed on low setting, 2,500 RPM on medium and 3,000 RPM on high
- Rugged, overmolded frame
- Dual power source features 18 V battery and 110 V AC charging port
- 18 V DC three-speed BLDC motor
- 13-hour battery run time on low setting, six hours on medium and four hours on high
- Indexable fan housing with (3) 6-1/2" blades
- Propeller-style blades allow for maximum airflow
- Two integrated 2.1A USB ports
- Oversized handle for easy carrying
- Large easy-to-read control panel
- Fan uses a standard extension cord; no special cords are required (cord not included)
- Batteries and charger not included



CTAB9050

Blowers

CTAB9050 18 V MonsterLithium Cordless Blower (Tool Only)

- Brushless motor means superior durability, longer tool life and maximum run time
- Get the job done with a maximum air speed of 100 MPH
- Maximum air volume of 450 CFM and 14,800 RPM for quick turnaround time
- 15' clearance range
- High/Low switch for proper air speed
- Balanced, lightweight design
- Run-time is approximately: High, 10 minutes; Low, 20 minutes
- Operates on 4.0 or 5.0 Ah batteries
- Built-in hook for easy hanging
- Batteries and charger not included



CTINF9050

Cordless Inflators

CTINF9050 18 V MonsterLithium Cordless Inflator (Tool Only)

- Features heavy-duty 30 mm high-volume piston compressor motor
- 35 L/min maximum flow
- Inflates standard auto tire (195/65R15) 0-40 PSI in less than four minutes
- Thermal shutoff protection circuit
- Auto shutoff and pressure reset
- Backlit LCD display
- 44" field-replaceable hose
- Dual rear-mounted 200 lm LED lights
- Rugged overmolded frame
- Target PSI preset feature
- Two integrated 2.1 Ah USB ports
- Assorted nozzle inflators included
- 120 PSI maximum working pressure
- Batteries and charger not included



CTVAC9050A

Cordless Vacuums

CTVAC9050A 18 V MonsterLithium Cordless Vacuum (Tool Only)

- 2.5-gal wet or dry tank eliminates the need for two specialized vacuums
- Powerful 18 V motor delivers 59 CFM of volume to handle a wide range of material
- Industry-leading suction is ideal for broken glass, rocks, coins, sand and much more
- Oversize power switch is easier to use, even with gloves
- Extra long 6' hose can double in length so it can reach further into applications
- 19" extension wand helps keep you upright
- 9" crevice tool reaches the tightest spots
- 3-1 utility nozzle is 4-1/2" wide and includes a dust brush and silicone upholstery brush for pet hair
- Onboard storage for all accessories keeps productivity up
- Shielded battery port keeps debris and moisture away from the battery
- 15 minutes of run time on a 5 Ah battery charge to get the work done
- Oversized soft grip folding handle for comfort
- Batteries and charger not included

- CTVAC9050-22 9" Long Crevice Tool**
- CTVAC9050-23 Car Nozzle (Body)**
- CTVAC9050-24 Pet Hair Rake Adaptor**
- CTVAC9050-25 Dust Brush Adaptor**
- CTVAC9050-26 1-1/4" Extension Wand**
- CTVAC9050-27 1-1/4" 6' Flexible Hose**



CTVAC9050-22



CTVAC9050-25



CTVAC9050-23



CTVAC9050-26



CTVAC9050-24



CTVAC9050-27

Memory Savers/Power Inverters

CTI8850 18 V Power Inverter

- 175 W cordless inverter
- 120 V AC power
- 5 V 1 A USB output
- Overload, short circuit and battery voltage protector
- Flexible rotating head
- Protective external fuse and cooling fan
- Provides 110 V AC power anywhere

CTMS8850 18 V Cordless Memory Saver

- Provides temporary power to a vehicle to keep all presets (radio, seats, etc.) intact while the vehicle is being serviced
- Features a flexible swiveling head and protective external fuse for maximum flexibility and hassle-free use
- 4-hour run time at 12 V, 1 A; 1-hour run time at 12 V, 4 A (max output)
- 5 V, 1 A USB output
- Protective external fuse



USB Power Units

CTUSB761 14.4 V MicroLithium USB Power Unit

- Connects to battery for 5 V, 1 A output, up to two hours
- LED power indicator
- USB protective sliding cover
- Easy On/Off switch
- Use with CTB8172 and CTB8174 batteries (not included)
- Charges cell phones and other small electronic devices

CTUSB8850 Four-Port USB Device Charger

- Adaptor for 18 V MonsterLithium Ion battery pack
- Four-Port USB charging device
- (4) 5 V Outputs: 2 A, 1 A, .5 A, .5 A
- LED indicator for charge state
- Ratcheting mountable USB head
- Eight-hour run time at 5 V/2 A with CTB8187 battery (not included)
- Handy On/Off switch



EEBC12000USB Battery Pack

- Built-in flashlight
- Charge cell phone, etc. through USB ports
- Numerical battery power level display



CORDLESS: CHARGERS AND BATTERIES



Snap-on® Battery Packs

Stock No.	Type	Battery Voltage	Battery Style	Charge Time, minutes	Use with
CTB185	Lithium Ion	18 V 5.0 Ah	Slide-on	90	CT9010, CT9050, CT9080, CT9100, CTGR9050, CTCG8850, CTLED9050, CDR9015, CDR9050, CTRS8850A, CCG8850A, CTGR8845A, CTGR8850A, CTGR8855A, CTGRS8806A, CTGRS8825A, CTBF8818A
CTB1856	Lithium Ion	18 V 5.6 Ah	Slide-on	95	
CTB8174	Lithium Ion	14.4 2.5 Ah	Tower	70	Generic to All 14.4 V MicroLithium Product
CTB8187	Lithium Ion	18 V 5.0 Ah	Slide-on	90	Generic to All 18 V Lithium Product

CE - DE, ES, FR, IT, GB, NL, JP

CTB185 18 V 5 Ah MonsterLithium Battery with Dual Side Latches

- 18 V 5.0 Ah dual side latch battery
- No self discharge, will not lose charge when idle
- Four built in LED's indicate battery charge state
- No memory effect
- Glass filled nylon housing withstands drops
- 90 minute charge time
- Operates with CTC720, CTC123, CTC131 and CTC131A chargers
- Not compatible with 7850 and 8850 18 V family product

CTB1856 18 V 5.6 Ah MonsterLithium Battery

- 18 V 5.6 Ah dual side latch battery
- No self discharge, will not lose charge when idle
- Four built in LED's indicate battery charge state
- No memory effect
- Glass filled nylon housing withstands drops
- 95 minute charge time
- Operates with CTC720, CTC123, CTC131 and CTC131A chargers
- Not compatible with 7850 and 8850 18 V family product

CTB8174 14.4 V MicroLithium Battery

- 14.4 V 2.5 Ah high-capacity lithium battery (36 Wh)
- Weighs just 12 oz; fits 14.4 V and most 7.2 V 661 Series tools
- Fast 70-minute charge time
- No memory effect or self-discharge
- Glass-filled nylon housing for durability
- Operates on CTC772, CTC131, CTC131A and CTC123 chargers

CTB8187 18 V MonsterLithium Slide-On Battery

- 18 V 5.0 Ah high-capacity lithium battery (90 Wh)
- Fast 90-minute charge time
- Four-LED fuel gauge indicates battery and charger condition
- No memory effect or self-discharge
- Glass-filled nylon housing for durability
- Operates on CTC720, CTC123, CTC131 and CTC131A chargers



• Read Safety Precautions on pages W1-W4

CORDLESS: CHARGERS AND BATTERIES

Snap-on® Battery Chargers

Stock No.	Type	Application
CTC131A	14.4 and 18 V Dual Bay Charger	CTB7172, CTB8172, CTB8174, CTB7185, CTB8185, CTB8187, CTB185, CTB1856
CTC772A	7.2 V/14.4 V Lithium Charger	CTB6172, CTB7172, CTB8172 and CTB8174

Batteries not included.
 CE - DE, ES, FR, IT, GB, NL, JP



CTC131A

CTC131A 14.4 and 18 V Dual Bay Charger

- Dual bay: Charges 14.4 V MicroLithium and 18 V Lithium batteries consecutively
- Integrated USB port: Charges phones and small electronic devices
- LED fuel gauge indicator: Indicates the state of the battery charge
- Low profile: Great for tool storage
- Wall mountable: Easy to hang for out-of-the-way use
- Heavy-duty cord with daisy chain plug: Allows other electronics to remain plugged in
- One year warranty
- FCC, CE, BC, Square D marked
- Batteries sold separately



CTC772A

CTC772A 14.4 V MicroLithium Battery Charger

- Charges all 7.2 V and 14.4 V Lithium batteries



CTCCORDA2B



CTCCORDA2C



CTCCORDA2L



CTCCORDC2C



CTCCORDC2L

Snap-on® USB Cords

CTCCORDA2B USB Cord Set A-to-B Connection

CTCCORDA2C USB Cord Set A-to-C Connection

CTCCORDA2L USB Cord Set A-to-Lightning Connection

CTCCORDC2C USB Cord Set C-to-C Connection

CTCCORDC2L USB Cord Set C-to-Lightning Connection

- 6-1/2' length allows the user to move around
- Heavy-duty internal aramid fibers for enhanced durability
- Offers extended strain relief protection from pulling and bending
- Welded metal shield design provides EMI protection
- PPE cable jacket is soft and protects against the elements
- Braided cable made with eco-friendly materials provides high friction resistance
- 2.5 A for fast charging

CORDLESS: SCREWDRIVER ACCESSORIES



CTS561 Series Screwdriver Accessories

CTEXTSET 4 pc Quick-Change Extensions Set

- Includes CTEXT6 and CTEXT12 quick change extensions plus a T15 TORX® bit (1/4" shank) and a PHILLIPS® bit (power groove hex shank)
- Ideal companion to the CTS series screwdrivers where extended reach is needed

CTEXT6 6" Quick-Change Extension

CTEXT12 12" Quick-Change Extension

- For rotary power tools
- Ideal companion to the CTS561 and CTS561CL Series screwdrivers where extended reach is needed
- Accepts all worldwide industrial standards for hex shanks
- Hardened extension directly transfers rotary power without a loss of torque
- Hex design eliminates slippage and optimizes power
- Hex lock mechanism is better than magnet styles and holds the accessories unit until released
- Maximum RPM: 2,500
- Torque rate: 167 in-lb

CTS561CHUCK 1/4" Quick-Change Keyless Drill Chuck

- 1/4" hex shank for fast changeover
- Compact size improves access and visibility of the drilling surface
- 1/4" chuck capacity provides convenience for small jobs
- 1/32–1/4" drill capacity
- Used for light duty, small holes in metal and wood

CTS561HOLSTR Holster Bit Set

- Includes PHILLIPS® bits #0, #1, #2; flat tip bits 3/16, 7/32, 1/4"; and TORX® bits T15, T25
- Attaches to a belt to keep the bits close for ready use

Power Bit Sets

CTS561BITSET 23 pc 1/4" Drive Quick-Change Bit Set (Blue-Point®)

- For use with Snap-on® cordless screwdrivers and other power drivers
- Manufactured from industrial-grade tool steel
- Includes (22) bits (all 3" long), plus a 1/4" square drive (2" long)
- Includes PHILLIPS® bits #0, #1, #2; flat tip bits 5/32", 3/16", 7/16", 1/4", 9/32"; TORX® bits T10, T15, T20, T25, T27, T30, T40; hex bits 3/32", 7/64, 1/8", 5/32", 3/16", 7/32" and 1/4" in a storage case



CTS561BITSET



GA236C

Engravers

GA236C Engraver (Blue-Point®)

- Marks all materials
- Includes 3 mm tungsten carbide tip
- Nine-position stroke adjustment to control engraving depth
- Soft-coated housing provides better comfort and handling
- Super-smooth action is ideal for precision engraving

GA236C1 Tungsten Carbide Tip (Blue-Point®)

- 3 mm tungsten carbide tip

GA236-32 Diamond Tip

- Optional heavy-duty tip



ETB1580B

Polishers

ETB1580B 7" Variable-Speed Polisher (Blue-Point®)

- Six-position speed setting allows the user to dial in the desired speed
- Soft-start trigger for increased control
- Push-button spindle lock for quick and easy pad changes
- Polishes and details autos, trucks and boats



WARNING



- Do not use power tool accessories above their maximum rated RPM.
- Read instructions before using power tools.
- Do not use bits with impact driver.
- Read Safety Precautions on pages W1–W4